
ValueLight[™] Jumpers & Pigtails

Siemon's ValuLight line of fiber cable assemblies provide exceptional value at a very competitive cost. ValuLight fiber cable assemblies meet TIA/EIA-568-C.3 and ISO/IEC 11801 specifications for insertion loss and return loss. They are ideal for commercial cabling data applications up to and including 1 gigabit. Cords are available in popular connector types and in both multimode and singlemode fiber versions. All jumpers and pigtails are covered by the Siemon product warranty.



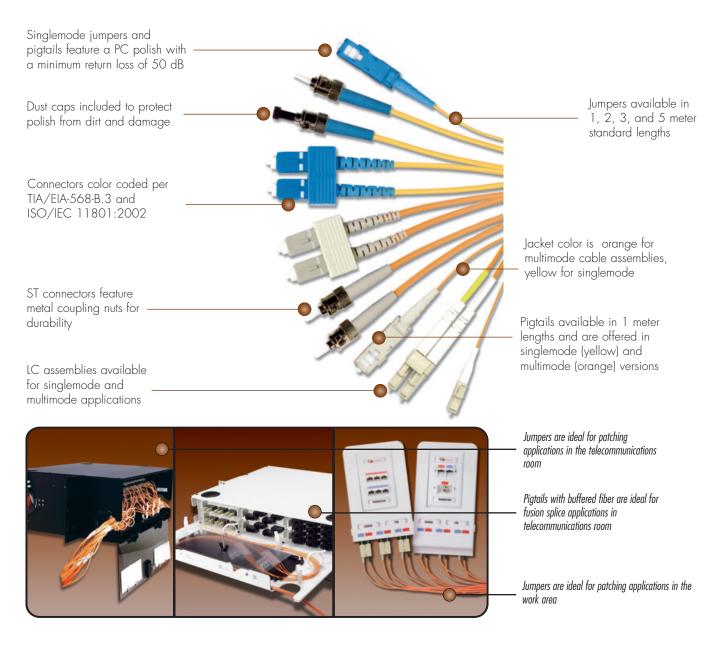

	50/125µn	n Multimode	62.5/125µn	n Multimode	Singlemode
Wavelength (nm)	850	1300	850	1300	n/a
Min. Cable Bandwidth (MHz-km)	500	500	200	500	n/a
Max. Insertion Loss (dB)	0.75 (0.15 Typical)			0.75 (0.25 Typical)	
Min. Return Loss (dB)	20 (25 Typical)		50 (55 Typical)		

ValuLight[™] Multimode Duplex Jumpers:

J2-SCSC(X)-(XX)	SC to SC duplex jumper, orange
J2-SASA(X)-(XX)	ST to ST duplex jumper, orange
J2-SASC(X)-(XX)	ST to SC duplex jumper, orange
J2-LCLC(X)-(XX)	LC to LC duplex jumper, orange
J2-LCSC(X)-(XX)	LC to SC duplex jumper, orange
J2-LCSA(X)-(XX)	LC to ST duplex jumper, orange

ValuLight Multimode Pigtails:

FIBER PRODUCTS

P1B-SC(X)-01	.SC simplex pigtail, orange, buffered, 1m (3.3 ft.)	900 micron,
PTB-SA(X)-01	.ST simplex pigtail, orange, buffered, 1m (3.3 ft.)	900 micron,
P1B-LC(X)-01	.LC simplex pigtail, orange, buffered, 1m (3.3 ft.)	900 micron,

ValuLight Singlemode Duplex Jumpers:

J2-SCSCP-(X)	()SC to SC di	plex jumper, yello	w
J2-SASAP-(X)	X)ST to ST dup	olex jumper, yellow	v
J2-SASCP-(X)	X)ST to SC du	plex jumper, yellow	N
J2-LCLCP-(XX)LC to LC du	plex jumper, yellov	v
J2-LCSCP-(XX	()LC to SC du	plex jumper, yellov	w
	()LC to ST du		

ValuLight Singlemode Simplex Pigtails:

P1B-SCP-01	SC simplex pigtail, yellow, 900 micron, buffered, 1m (3.3. ft.)
P1B-SAP-01	ST simplex pigtail, yellow, 900 micron, buffered, 1m (3.3. ft.)
P1B-LCP-01	LC simplex pigtail, yellow, 900 micron, buffered, 1m (3.3. ft.)
	buffered, 1m (3.3. ft.)

Use (X) to specify multimode fiber type: 5 = 50/125µm fiber, 6 = 62.5/125µm fiber Use (XX) to specify length: 01 = 1m (3.3 ft.), 02 = 2m (6.6 ft.), 03 = 3m (9.8 ft.), 05 = 5m (16.4 ft.)

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

ValuLight[™] is a trademark of Siemon

Worldwide Headquarters North America Watertown, CT USA Phone (1) 860 945 4200 US Phone (1) 888 425 6165 Regional Headquarters EMEA Europe/Middle East/Africa Surrey, England Phone (44) 0 1932 571771 Regional Headquarters Asia/Pacific Shanghai, P.R. China Phone (86) 21 5385 0303 Regional Headquarters Latin America Bogota, Colombia Phone (571) 657 1950