


VersaPOD™ 4-POST RACK

Siemon's adjustable-depth, VersaPOD 4-Post Rack provides a stable platform for mounting extended depth/size active equipment. It is ideal for use in both Telecommunications Rooms and central patching areas within Data Center environments.

In addition to providing compatibility with Siemon's standalone vertical cable managers, the 4-post rack is fully compatible with the Zero-U panels used in Siemon's VersaPOD™ cabinets. This compatibility allows for mounting of patch panels or cable management between bayed racks or at end of rows.

The headers, vertical rails and depth adjustment brackets all feature symmetrical designs to eliminate orientation errors during assembly. They also work in conjunction to self-square the rack during assembly saving valuable installation time. The result is a rack that can be field assembled in less than 20 minutes.

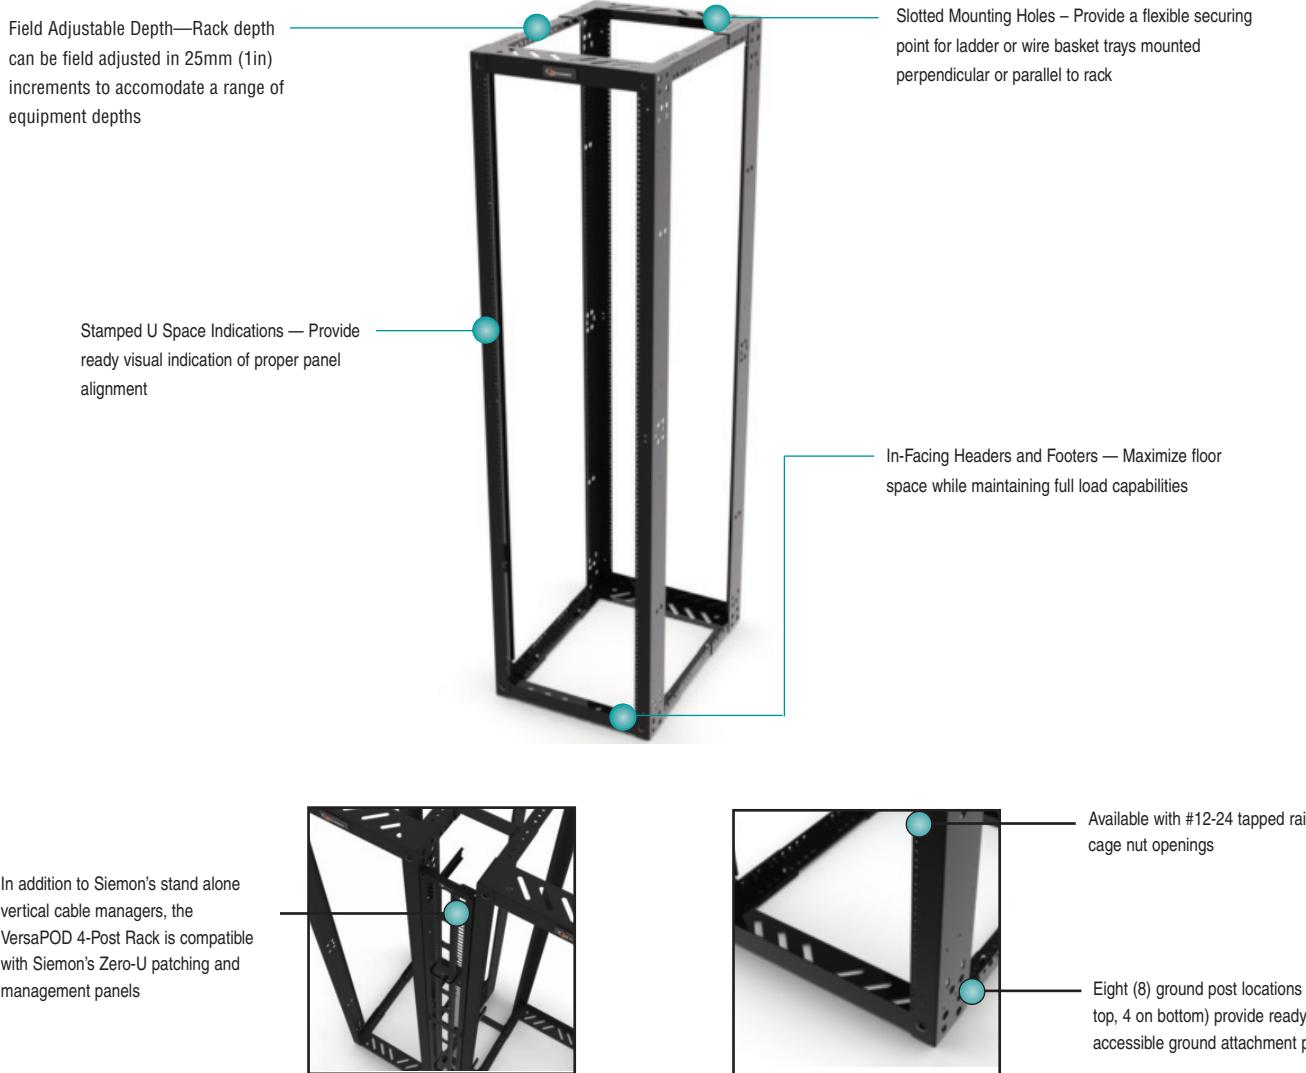

Ordering Information

VersaPOD 4-Post Rack™:

RSQ1-07-S.....7 ft. x 19 in. VersaPOD 4-post rack, 560-915mm (22-36 in.), Steel, Black, 45U, #12-24
RSQ1-07C-S.....7 ft. x 19 in. VersaPOD 4-post rack, 560-915mm (22-36 in.), Steel, Black, 45U, Cage nuts*
RSQ-BAY-VPP.....VersaPOD 4-post rack baying bracket for Zero-U Panels, set of 4

Note: VPC series baying brackets are optional to ensure row alignment, they are unnecessary if VPC or RS-CNL products are used for both front and back of rack.

Zero-U baying brackets are required to ensure proper operation of Zero-U panels.

*Includes bag of 50 M6 cage nuts



height: 2.13m (7 ft.)
width: 560mm (22 in.)
depth: 558 -914mm (22-36 in.)

1U = 44.5mm (1.75 in.)

VersaPOD 4-Post Rack Specifications:

U Space	45
Color	Black
Packaging	Ships unassembled in a single carton
Compliance	CEA-310-E, UL 60950, IEC 60297-3-100, RoHS
Weight	48 kgs (105 lbs), Full weight with packaging
Load Rating	907 kgs (2000 lbs) Static load, evenly distributed

For related product information request Spec Sheet(s):

VersaPOD Panels & Cable Managers (PROD-SS-VPODPANELS)

RouteIT Cable Managers (SS_RouteIT)

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

VersaPOD™ is a trademark of Siemon

Worldwide Headquarters
North America
Watertown, CT USA
Phone (1) 860 945 4200 US
Phone (1) 888 425 6165

Regional Headquarters
EMEA
Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

Regional Headquarters
Asia/Pacific
Shanghai, P.R. China
Phone (86) 21 5385 0303

Regional Headquarters
Latin America
Bogota, Colombia
Phone (571) 657 1950